



# Combo Valve for LPG Vessels No 6078

## Technical sales Specification.

The Bullfinch Combination Valve number 6078 is suitable for installation into bulk LPG vessels, the valve combines the fill, liquid offtake, vapour offtake and fixed liquid level gauge functions.

### Performance characteristics:

Average liquid fill rate: 130 I/min.  
Average liquid empty rate: 62.5 I/min.  
Average vapour flow rate: 21m<sup>3</sup>/hour

The service life of the valve is 20 years and the following parts that can be replaced due to damage or wear are as follows:~


Liquid Fill Connection Cap SP 6078 F  
Liquid Offtake Connection Cap SP 6078 G  
Fixed Liquid Level Gauge SP 6078 H

Note: No other part can be changed in the field.

The valve is suitable for reconditioning; this should only be carried out by a company approved by Bullfinch (Gas Equipment) Limited.

The Combo Valve number 6078 meets the requirements of the UK Pressure Equipment Regulations No. 2001 – 1999, Amended No 399 - 2015 and the European Pressure Equipment Directive 2014/68/EU.

The valve has been manufactured and tested using sound engineering practice in accordance with the requirements of BS EN 13175 – 2014.

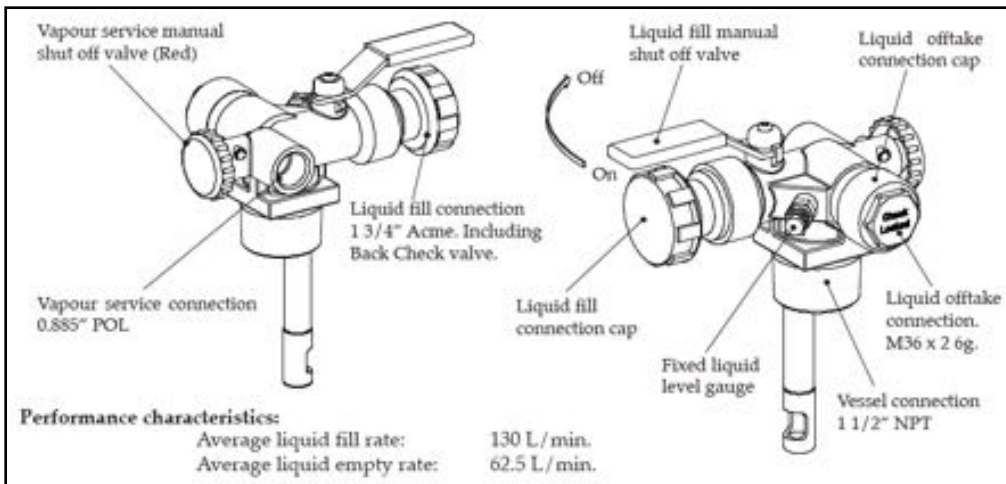

Eduction tubes and Dip tubes are available for various vessel sizes.

Eduction tubes - length and part no	Dip tubes - length and part no
636mm - 6078J	192mm - 6078AA
825mm - 6078L	225mm - 6078AB
1025mm - 6078N	269mm - 6078AE
1224mm - 6078R	306mm - 6078AG
1415mm - 6078T	331mm - 6078AJ
1423mm - 6078U	368mm -
1432mm - 6078AX	496mm - 6078AT

For further information contact the sales department at:

Bullfinch (Gas Equipment) Limited, Diadem Works, Kings Road, Tyseley, Birmingham B11 2AJ  
England, UK Tel: 0121 765 2000 (Int +44 121 765 2000) Fax: 0121 707 0995 (Int +44 121 707 0995)  
e-mail: [sales@bullfinch-gas.co.uk](mailto:sales@bullfinch-gas.co.uk) web: [www.bullfinch-gas.co.uk](http://www.bullfinch-gas.co.uk) Copyright - © 2015